

Parrot MULTICOMM For Nissan 2 steering wheel

Parrot MULTICOMM is a unit able to control Parrot H/F kits with the car's steering wheel commands working with ANALOG STEERING WHEEL COMMANDS with OEM headunit installed.

This unit is available in two versions, one working with the CK3000 Evolution, another for the CK3100.



Compatibilty car models :

Nissan X-Trail : > 2006



Parrot Reference :

If you are interested, contact our sales department: sales@parrot.fr

For Parrot CK3000 EVOLUTION

- Parrot MULTICOMM : **PI090003AA**

For Parrot CK3100 LCD

- Parrot MULTICOMM : **PI090004AA**




Features :

Depending on your vehicle's steering wheel controls, there are several possibilities for using a hands-free kit with the steering wheel controls:

- **Mode 1:** the steering wheel does not feature any phone button, but only volume adjustment controls ("Volume (+)" and "Volume (-)" buttons)
- **Mode 2:** the steering wheel features a single "Phone" button
- **Mode 3:** the steering wheel features an "Answer" button and a "Hang up" button

With these Nissan cars, you can only use **Mode 1**.

Mode 1: Using with the volume adjustment buttons

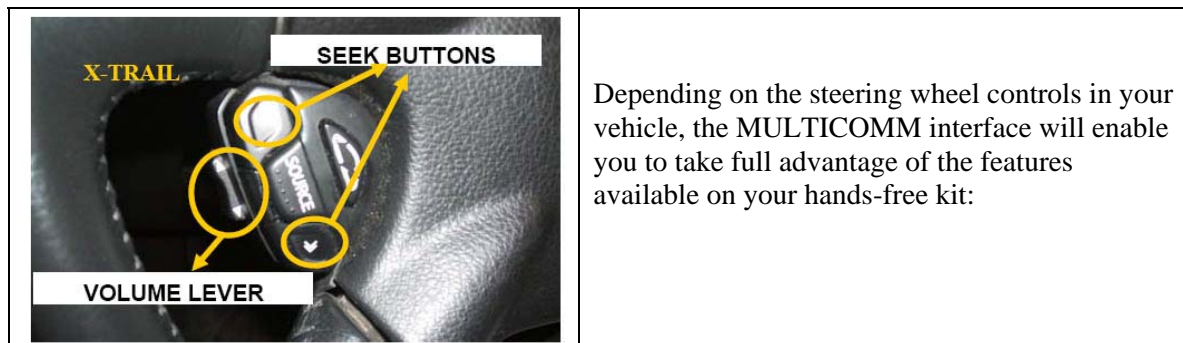

Depending on the steering wheel controls in your vehicle, the MULTICOMM interface will enable you to take full advantage of the features available on your hands-free kit:

| | |
|---------------------------------------|---|
| •Answer an incoming call: | Press the "Volume (+)" button. |
| •End a call: | Press the "Volume (-)" button. |
| •Refuse an incoming call: | Press the "Volume (-)" button. |
| •Start the voice recognition feature: | Quickly press the "Volume (+)" button, then press the "Volume (-)" button. |
| •Redial the last number: | Quickly press the "Volume (+)", followed by a long press of the "Volume (-)"until the number is dialled. |
| •Discreet mode: | Quickly press the "Volume (+)" button. |
| •Exit discreet mode: | During the call, quickly press the "Volume (+)" button followed by a press of the "Volume (-)" button |
| •Increase the volume: | During the call, press the "Volume (+)" button and then on the "Volume (-)" button repeat this procedure until you reach the required volume. |
| •Lower the volume: | During the call, press the "Volume (-)" button and then on the "Volume (+)" button repeat this procedure until you reach the required volume. |

The followings functions are only possible with Parrot CK3000 Evolution


| | |
|---------------------------------|---|
| •Enter the menu: | Press the following sequence twice: "SEEK up" button then the "SEEK down" button. These buttons are used to search for radio stations. |
| •Go forward through the menu: | Press the "Volume (+)" button and then the "Volume (-)" button, leaving one second between each press. |
| •Go backwards through the menu: | Press the "Volume (-)" button and then the "Volume (+)" button, leaving one second between each press. |
| •Select a menu option: | Press the "Volume (+)" button. |
| •Cancel a function: | Press the "Volume (-)" button. |
| •Reset the hands-free kit: | Repeat the following sequence five times: press the "Volume (-)" button and then the "Volume (+)" button. |

Wiring diagram for CK3000 EVOLUTION and CK3100 LCD


It is important to follow the wiring diagram for your vehicle. We would advise our customers to have the interface fitted by a professional.

In this technical document, you will find all information for correctly install your Parrot MULTICOMM interface.

CK3000 EVOLUTION

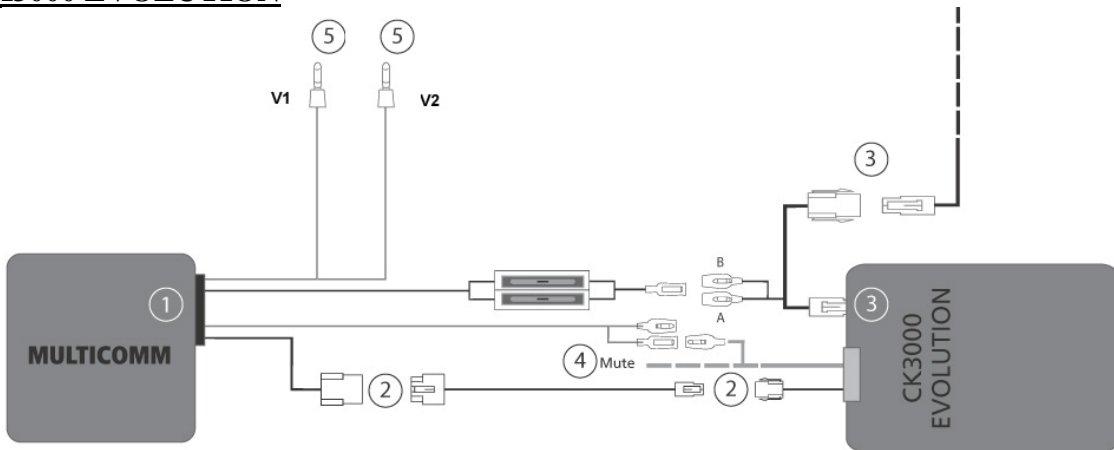

CK3100 LCD

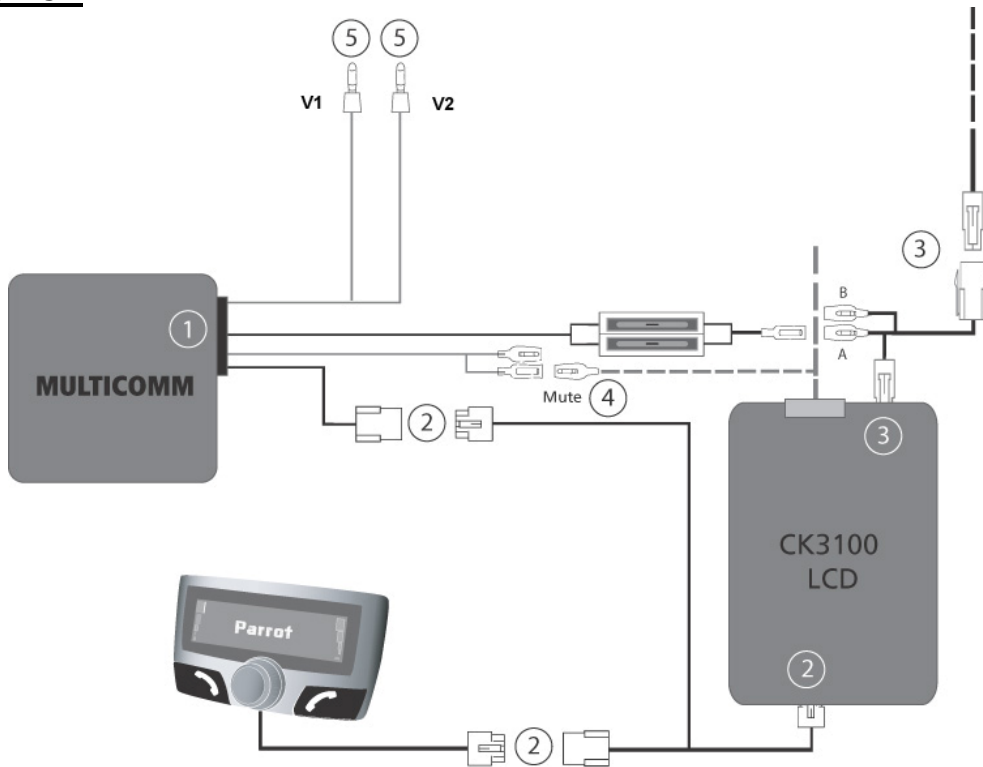










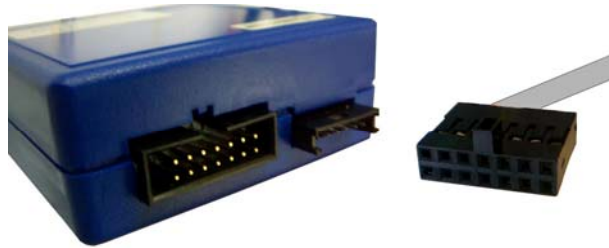






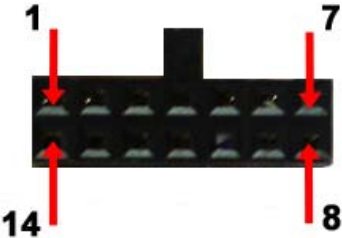
PARROT MULTICOMM interface

The **Parrot MULTICOMM** is powered with 12Vdc having negative to the ground.
The **Parrot MULTICOMM** 14 ways connector has 5 wires that are important for the right working:


Connect the power cable of the **Parrot MULTICOMM** interface to the 14-way connector of the **Parrot MULTICOMM** interface.



| N° | | Color | Function |
|----|---|----------------|---------------|
| 1 |  | Red / Orange | 12v Permanent |
| 2 |  | Yellow | Mute input |
| 3 |  | Pink | |
| 4 |  | Green / Black | |
| 5 |  | Blue | |
| 6 |  | Yellow / White | |
| 8 |  | Yellow /Brown | |
| 9 |  | Grey | |
| 10 |  | White | V2 |
| 11 |  | Blue / Red | |
| 12 |  | Brown | |
| 13 |  | Purple | V1 |
| 14 |  | Black | Ground |



Front view

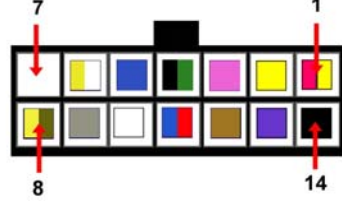










Back view

2



Keypad Adapter


Join the connector of the kit's control keypad to the connector on the interface's power cable.
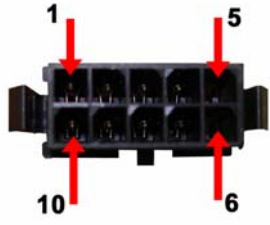
| Pin Number | | Colour |
|------------|---|----------------|
| 1 |  | Yellow / Brown |
| 2 |  | Grey |
| 3 |  | Yellow / White |
| 4 |  | Pink |
| 7 |  | Brown |
| 8 |  | Blue / Red |
| 9 |  | Green / Black |
| 10 |  | Blue |













In case of CK3000 EVOLUTION

| Pin Number | | Colour |
|------------|---|----------------|
| 2 |  | Green |
| 3 |  | White / Yellow |



In case of CK3100 LCD

| Pin Number | | Colour |
|------------|---|---------------|
| 1 |  | Black |
| 2 |  | Red / Blue |
| 3 |  | Green / Black |
| 4 |  | Brown |
| 5 |  | Green / Red |
| 6 |  | Grey / Black |
| 7 |  | Blue |
| 8 |  | Yellow / Red |

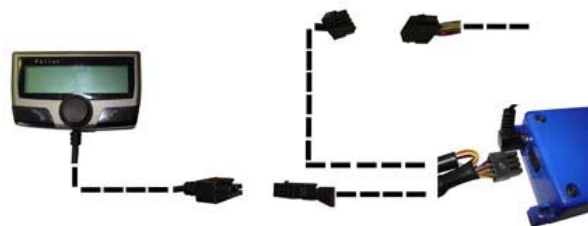

Connect the LCD display to the LCD adapter.

3

Supply connections

| Pin Number | Colour | Description |
|------------|--------|---------------|
| 1 | Red | 12v Permanent |
| 2 | Black | Ground |
| 3 | Orange | 12v Ignition |




CK3000 EVOLUTION



CK3100 LCD

Connect the Parrot MULTICOMM interface's power cable to the Parrot control unit and to the power cable of the hands-free kit.

4

Mute input

| Colors | Cable | Description |
|--------|-----------------|----------------------|
| Yellow | Mute cable | Mute Output |
| Yellow | MULTICOMM cable | Interface Mute input |
| White | ISO Power cable | Mute input 1 |
| Yellow | ISO Power cable | Mute input 2 |
| Blue | ISO Power cable | Mute input 3 |



Connect the yellow mute wire of the Parrot MULTICOMM interface :

- To the Parrot yellow mute wire
- And to the car stereo's mute input if applicable




Notes:


If you don't know where your mute input is, see the usual guide of your radio or contact your Nissan dealer for having the correct position of mute input.

5

Nissan protocol configuration

The wires corresponding to the Nissan protocol configuration must be connected correctly to your car stereo's information. It is important to follow the wiring diagram for your vehicle. We would advise our customers to have the interface fitted by a professional.
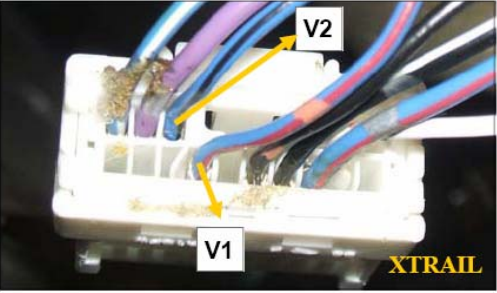
| N° | | Color | Function | Connectors |
|-----------------|---|--------|----------|--|
| BLUE/RED wire |  | Purple | V1 |  |
| BLUE/BLACK wire |  | White | V2 | |

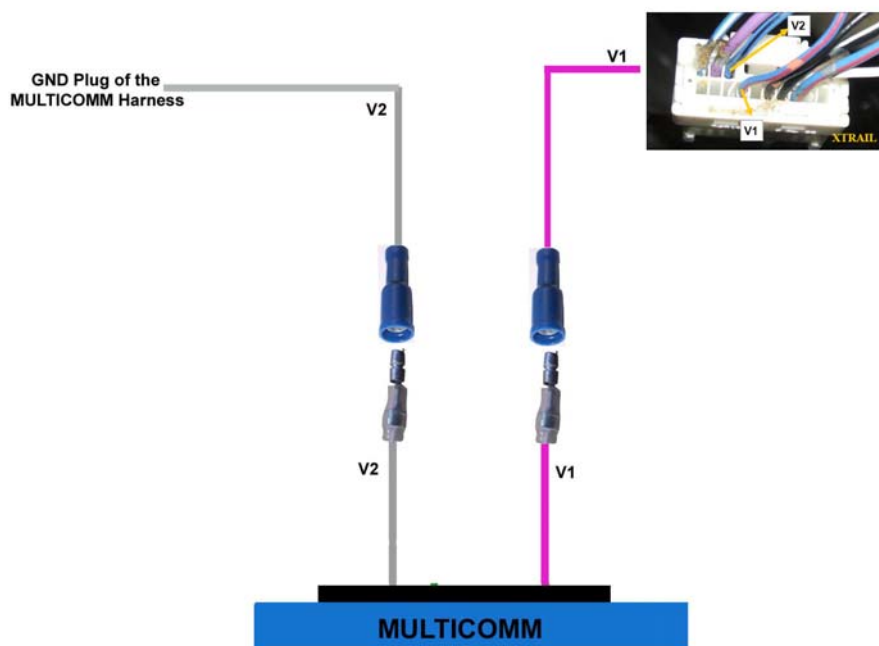

V1 wire must be connected to the BLUE/RED wire
V2 wire must be connected to the BLUE BLACK wire