

## Wiring for Honda

### ISO Adapter : AC000057AA



**Car models :**

Civic	> 2006	All sound system
Civic LX	> 2006	Without Amplifier
Civic Hybrid	> 2006	Without Amplifier
CR-V	> 2007	Without Premium sound
FIT	> 2007	Without Amplifier


**Reference : AC000057AA**

If you are interested, contact our sales department :








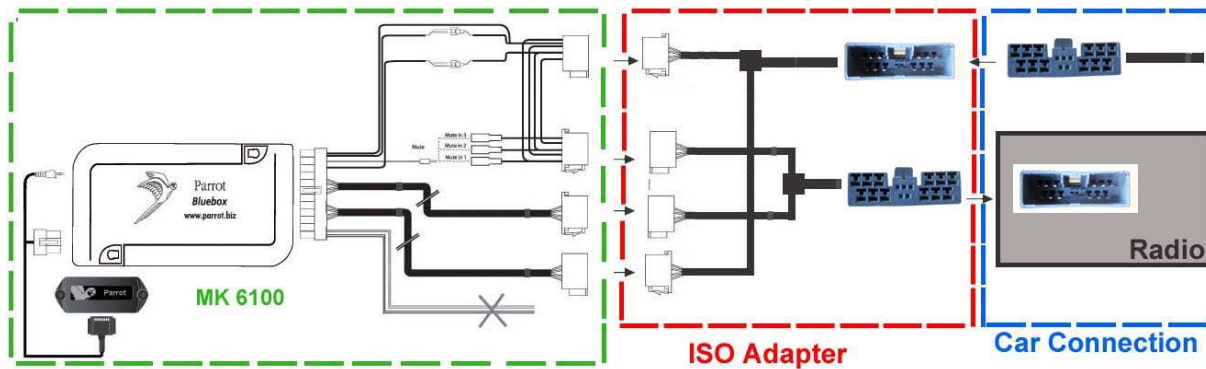



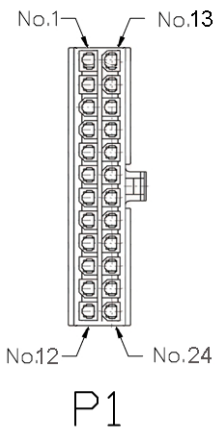













[sales@parrot.fr](mailto:sales@parrot.fr)











**Mounting Procedure for Parrot MK6100**




## Parrot MK6100 connectors :









 <p>P1</p>	Pin		Color	Function
	1		Purple Black	Rear Right Speaker -
	2		Grey black	Front Right Speaker -
	3		White black	Front Left Speaker -
	4		Green black	Rear Left Speaker -
	5		Green black	Rear Left Radio Speaker -
	6		White black	Front Left Radio Speaker -
	7		Grey black	Front right Radio Speaker +
	8		Purple Black	Rear Right Radio Speaker +
	9		Red	Line in 1P
	10		White	Line in 2P
	11		Yellow	Mute
	12		Black	Ground
	13		Purple	Rear Right Speaker -
	14		Grey	Front Right Speaker -
	15		White	Front Left Speaker -
	16		Green	Rear Left Speaker -
	17		Green	Rear Left Radio Speaker +
	18		White	Front Left Radio Speaker +
	19		Grey	Front right Radio Speaker +
	20		Purple	Rear Right Radio Speaker +
	21			Line in 1M
	22			Line in 2M
	23			12V Key (Fuse)
24			12 V (Fuse)	


### Power connectors

Pin Number		Couleur	Description
1		White	Mute In 1
2		Yellow	Mute In 2
3		Blue	Mute In 3
4		Orange	+ 12V Memory
5		Green	
6		Brown	
7		Red	+ 12 V Permanent
8		Black	Masse



### Audio connectors

Pin Number		Couleur	Description
1		Grey	Rear right speaker +
2		White	Rear right speaker -
3		Blue	Front right speaker +
4		Green	Front right speaker -
5		Red	Front left speaker +
6		Orange	Front left speaker -
7		Bronw	Rear left speaker +
8		Black	Rear left speaker -



## ISO Adapter connections

### Honda Audio

N°		Color	Description
16		Green	Rear left speaker +
15		White	Front left speaker +
12		Grey	Front Right speaker +
11		Violet	Rear Right speaker +
8		Green Black	Rear Left speaker -
7		White Black	Front Left speaker -
3		Grey Black	Front Right speaker-
2		Black Violet	Rear Right speaker -



### Honda Supply

N°		Color	Description
10		Yellow	+12 V Ignition
13		Red	+12 Permanent
1		Black	Ground

### Honda Audio

N°		Color	Description
16		Green	Rear left speaker +
15		White	Front left speaker +
12		Grey	Front Right speaker +
11		Violet	Rear Right speaker +
8		Green Black	Rear Left speaker -
7		White Black	Front Left speaker -
3		Grey Black	Front Right speaker-
2		Black Violet	Rear Right speaker -



### Honda Supply

N°		Color	Description
10		Yellow	+12 V Ignition
13		Red	+12 Permanent
1		Black	Ground